



Servo-assisted 3/2 way Solenoid Valve for pneumatics

- High flow-rate capacity
- Reduced power consumption
- Single or manifold mounting
- Standard, Ex mb, Ex eb mb and Ex ia versions
- Threaded port G 1/4" and NPT 1/4"

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 2507 Cable plug, form B according to industry standard	►
	Type 2516 Cable plug, form C according to DIN EN 175301-803	►
	Type 2518 Cable plug, form A according to DIN EN 175301-803	►
	Type 2030 2/2-way diaphragm valve with pneumatic plastic actuator (Type CLASSIC)	►
	Type 1087 Timer, form A according to DIN EN 175301-803	►

Type description

The Type 6518 is a servo-assisted 3/2-way valve and the Type 6519 is a 5/2 or 5/3-way valve. Together, they form a product line. The valves can be used individually or in blocks. The valves work without a continuous air consumption and are used for the pneumatic control of double or single-acting actuators. The use of high quality materials makes it possible to use these valves in the open air and under chemical atmospheres. The product line contains units with Ex-Approvals and NAMUR flange interface. Valves with circuit function C, D and H monostable are certified acc. IEC 61508 as SIL2.

Table of contents

1. General technical data	4
2. Product versions	5
2.1. Standard version.....	5
2.2. Ex mb and Ex eb mb version	6
2.3. Ex ia version.....	7
3. Circuit functions	7
4. Approvals and conformities	8
4.1. General notes	8
4.2. Conformity	8
4.3. Standards.....	8
4.4. Explosion protection.....	8
4.5. North America (USA/Canada)	8
5. Materials	9
5.1. Bürkert resistApp	9
6. Dimensions	9
6.1. Pneumatic module Type MP07	9
6.2. Standard version 3/2-way valve, circuit function C and D.....	10
With plug form B or C.....	10
With plug form A	10
6.3. Ex mb/eb mb version 3/2-way valve, circuit function C and D	11
With moulded cable (3 m long) (Ex mb)	11
With terminal box (Ex eb mb)	11
6.4. Ex ia version 3/2-way valve, circuit function C	12
6.5. ATEX version cable coil and terminal box.....	13
7. Product design and assembly	14
7.1. Block assembly	14
8. Product accessories	15
8.1. Cable glands for ATEX/IECEx terminal box	15
8.2. Special tool to turn the terminal box	15
9. Ordering information	16
9.1. Bürkert eShop	16
9.2. Bürkert configurator	16
9.3. Bürkert product filter	16
9.4. Ordering chart standard version.....	17
With plug form A	17
With plug form B	18
With plug form C.....	18
9.5. Ordering chart Ex mb version (with moulded cable).....	19
9.6. Ordering chart Ex eb mb version (with terminal box)	19
9.7. Ordering chart Ex ia version (310 Ohm)	20
9.8. Ordering example Type 6518 with pneumatic module Type MP07	20

9.9. Ordering chart accessories..... 21

 Cable plug Type 2513, form A according to DIN EN 175301 - 803 21

 Cable plug Type 2518, form A according to DIN EN 175301 - 803 21

 Cable plug Type 2507, form B according to industry standard.....22

 Cable plug Type 2516, form C according to DIN EN 175301 - 80322

 Cable glands for ATEX/IECEX terminal box23

DTS 1000011064 EN Version: H Status: RL (released | freigegeben | validé) printed: 18.12.2024

1. General technical data

Product properties	
Dimensions	Further information can be found in chapter "6. Dimensions" on page 9.
Material	
Seal	NBR and PUR
Body	Polyamide, reinforced glass-fibre
Threaded bushing	Brass (stainless steel on request)
Manual override	Standard
Orifice	DN 8...DN 9
Pneumatic module	MP07
Circuit function	C and D Further information can be found in chapter "3. Circuit functions" on page 7.
Thermal insulation class of solenoid coil	Polyamide coil class B Epoxy coil class H
Performance data	
Compressed air quality	ISO 8573-1:2010, class 7.4.4 ²⁾
Duty cycle	100 % continuous operation
Switching time ¹⁾	
Opening	Pressure build-up 0...10 %
Closing	Pressure reduction 100...90 %
Medium data	
Operating medium	Neutral medium (e.g. lubricated or oil-free compressed dry air)
Process/Port connection & communication	
Electrical connection	- Plug contacts according to DIN EN 175301 - 803 form A for cable plug Type 2518 ▶ Further information can be found in chapter "Cable plug Type 2518, form A according to DIN EN 175301 - 803" on page 21. - Plug contacts according to DIN EN 175301 - 803 form B for cable plug Type 2507 ▶ Further information can be found in chapter "Cable plug Type 2507, form B according to industry standard" on page 22. - Plug contacts according to DIN EN 175301 - 803 form C for cable plug Type 2516 ▶ Further information can be found in chapter "Cable plug Type 2516, form C according to DIN EN 175301 - 803" on page 22. - Plug contacts according to DIN EN 175301 - 803 form A for cable plug Type 2513 ▶ Further information can be found in chapter "Cable plug Type 2513, form A according to DIN EN 175301 - 803" on page 21.
Pneumatic connection	
Supply connection 1, 3, 5	Threaded G ¼, NPT ¼
Working ports 2, 4	Threaded G ¼, NPT ¼
Auxiliary pilot air connection	M5
Approvals and conformities	
Degree of protection	IP65 with cable plug
Explosion protection	Further information can be found in chapter "4.4. Explosion protection" on page 8.
North America (USA/Canada)	Further information can be found in chapter "4.5. North America (USA/Canada)" on page 8.
Environment and installation	
Installation position	As required, preferably with actuator upright

1.) Measurement at + 20 °C, 6 bar at valve outlet

2.) To prevent freezing of the expanded compressed air, the pressure dew point must be at least 10 K lower than the temperature of the medium.

2. Product versions

2.1. Standard version



Note:
For general technical data, see [“1. General technical data” on page 4.](#)

Type 6518 is a pilot operated 3/2-way valve (normally closed or open). The valve width of 32 mm allows high flow rates. The valves can be used individually or in blocks.

Product properties	Coil size 24.5 mm	Coil size 32 mm
Weight	212 g	384 g
Switching time		
Opening	20 ms	20 ms
Closing	40 ms	40 ms
Electrical data		
Operating voltage	24 V DC	24 V DC 24/110/230 V 50/60 Hz
Power consumption		
Inrush	–	AC: 11 VA AC: 6/2 VA/W
Hold	DC: 1.7 W	DC: 2 W
Medium data		
Medium temperature	- 10 °C...+ 55 °C	- 10 °C...+ 55 °C
Process/Port connection & communication		
Electrical connection	• Plug contacts according to DIN EN 175301 - 803 form B for cable plug Type 2507 ▶ Further information can be found in chapter “Cable plug Type 2507, form B according to industry standard” on page 22. • Plug contacts according to DIN EN 175301 - 803 form C for cable plug Type 2516 ▶ Further information can be found in chapter “Cable plug Type 2516, form C according to DIN EN 175301 - 803” on page 22.	• Plug contacts according to DIN EN 175301 - 803 form A for cable plug Type 2518 ▶ Further information can be found in chapter “Cable plug Type 2518, form A according to DIN EN 175301 - 803” on page 21.
Environment and installation		
Ambient temperature	- 25 °C...+ 55 °C	- 25 °C...+ 55 °C

2.2. Ex mb and Ex eb mb version



Note:

- Ex mb (with moulded cable) or Ex eb mb (with terminal box)
- The maximum medium temperature must never exceed the permitted temperature class (T4: + 135 °C, T5: + 100 °C, T6: + 85 °C) minus 5 K.

The approval Ex mb is achieved by the mounting of an approved push-over coil. The cable connection and the cable are non-detachable and sealed together with the valve. The valves can be used individually or in blocks.



Product properties		
Weight	600 g	
Switching time		
Opening	20 ms	
Closing	50 ms	
Electrical data		
Operating voltage	24/110/230 V UC	
Voltage tolerance	+ 10 %	
Medium data		
Medium temperature	- 10 °C...+ 55 °C	
Process/Port connection & communication		
Electrical connection	3 m cable, moulded Terminal box (without fuse)	
Approvals and conformities		
Explosion protection	ATEX	IECEX
Coil with cable	EPS 18 ATEX 1 232 X	IECEX EPS 18.0110X
	II 2G Ex mb IIC T* Gb	Ex mb IIC T* Gb
	II 2D Ex mb IIIC T*** °C Db	Ex mb IIIC T*** °C Db
Coil with terminal box	EPS 18 ATEX 1 232 X	IECEX EPS 18.0110X
	II 2G Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb
	II 2D Ex mb tb IIIC T*** °C Db	Ex mb tb IIIC T*** °C Db
Environment and installation		
Ambient temperature	- 25 °C...+ 50 °C	

T* = temperature classes T4, T5 or T6

DTS 1000011064 EN Version: H Status: RL (released | freigegeben | valide) printed: 18.12.2024

2.3. Ex ia version



- Note:**
- The maximum medium temperature must never exceed the permitted temperature class (T4: +135 °C, T5: +100 °C, T6: +85 °C) minus 5 K.
 - The units may only be used in potentially explosive atmospheres in the manner approved by the admission board, i.e. the permissible maximum electrical values must be observed.
 - The valves is intended for operation at 24 V DC outputs via the intermediate switching of a corresponding intrinsically safe operating resource (isolating module or barrier).
- The intrinsically-safe Type 6518 Ex ia valve consist of an intrinsically-safe pilot control and a pneumatic amplifier. The diaphragm-controlled valve seats work with very low friction, ensuring reliable switching of the valve, even after long shut-down periods.

Product properties		
Weight	580 g	
Switching time		
Opening	75 ms	
Closing	115 ms	
Electrical data		
Function values for switching function valve	At + 20 °C	At + 55 °C
Minimum switching current	29 mA	29 mA
Nominal resistance coil	310 Ω	360 Ω
Minimum terminal voltage	9.0 V	10.4 V
Conformity specifications		
Ui	35 V	
Ii	0.9 A	
Pi	1.1 W	
Medium data		
Medium temperature	- 10 °C...+ 55 °C	
Process/Port connection & communication		
Electrical connection	Cable plug Type 2518, form A acc. to DIN EN 175301 - 803. Further information can be found in chapter “Cable plug Type 2518, form A according to DIN EN 175301 - 803” on page 21.	
Approvals and conformities		
Explosion protection	ATEX	IECEx
	EPS 18 ATEX 1 088 X	IECEx EPS 18.0038X
	II 2G Ex ia IIC T6/T4 Gb	Ex ia IIC T6/T4 Gb
	II 2D Ex ia IIIC T135 °C Db	Ex ia IIIC T135 °C Db
Environment and installation		
Ambient temperature	- 25 °C...+ 55 °C	

3. Circuit functions

Symbol	Description
	Circuit function C (CF C) 3/2-way solenoid valve Servo-controlled Normally closed
	Circuit function C (CF C) 3/2-way solenoid valve Servo-controlled, with manual override Normally closed
	Circuit function D (CF D) 3/2-way solenoid valve Servo-controlled, with manual override Normally open

4. Approvals and conformities

4.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available versions can be supplied with the below mentioned approvals or conformities.

4.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

4.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

4.4. Explosion protection

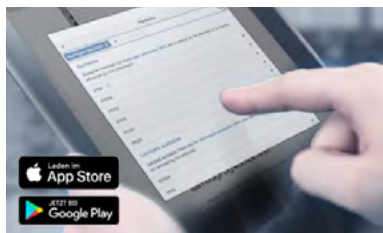
Approval	Description
 	Optional: Explosion protection Refer to the corresponding sub-chapter in chapter "2. Product versions" on page 5 for more information.

4.5. North America (USA/Canada)

Approval	Description
	Optional: UL Listed for the USA and Canada The products are UL Listed for the USA and Canada according to: • UL 429 (electrically operated valves) • CAN/CSA-C22.2 No. 139 - 19
	Optional (valid for coils): UL Hazardous Locations – Explosion Protection UL Listed for Hazardous Locations for USA and Canada Class I, Zone 1 Class I, Division 2, Group A, B, C and D Class II + III, Division 2, Group F and G
	Optional: UL Recognized for the USA and Canada The products are UL Recognized for the USA and Canada according to: • UL 429 (electrically operated valves) • CAN/CSA-C22.2 No. 139 - 19
	Optional (valid for coils): FM (Factory Mutual) – Explosion Protection FM for Hazardous Locations for USA and Canada Class I, Zone 1 Class I, Division 1, Groups A, B, C and D Class II + III, Division 1, Groups E, F and G

5. Materials

5.1. Bürkert resistApp



Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

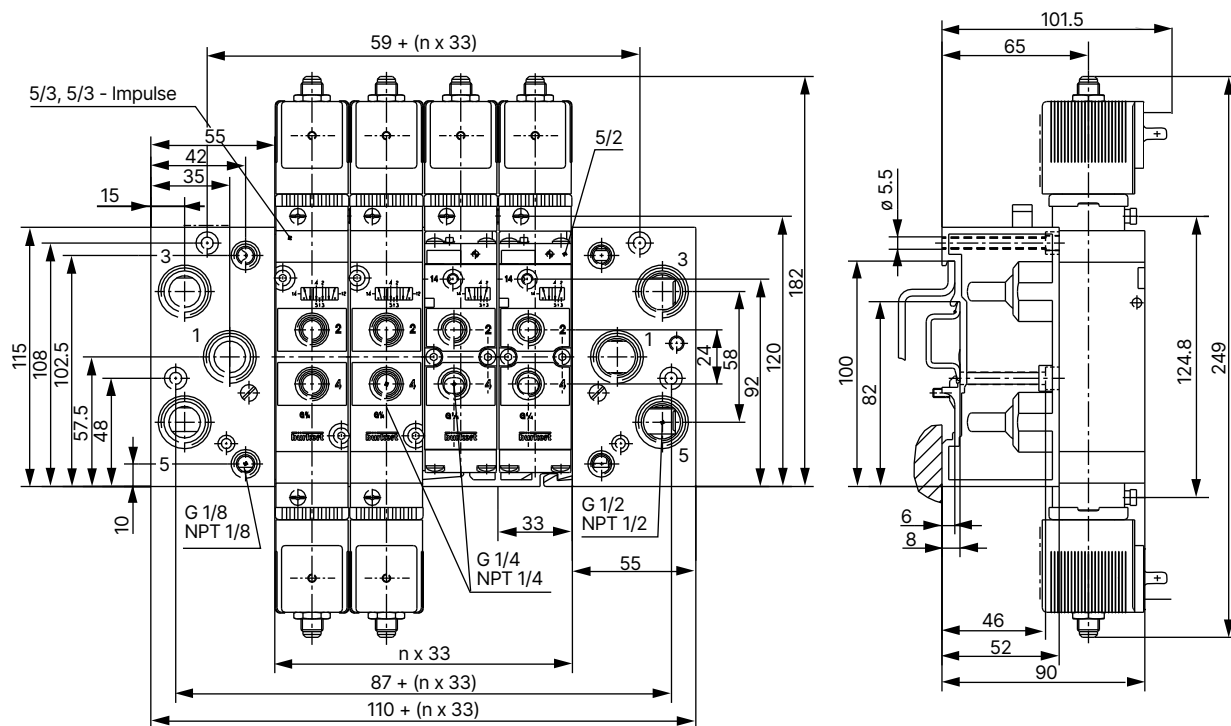
[Start chemical resistance check](#)

6. Dimensions

6.1. Pneumatic module Type MP07

Note:

- Dimensions in mm
- n = no. of valves, maximum 12
- Block mounting on wall or with DIN rail 50022 or 50023
- Valve mounting on the pneumatic modules Type MP07 by means of included M4 screws

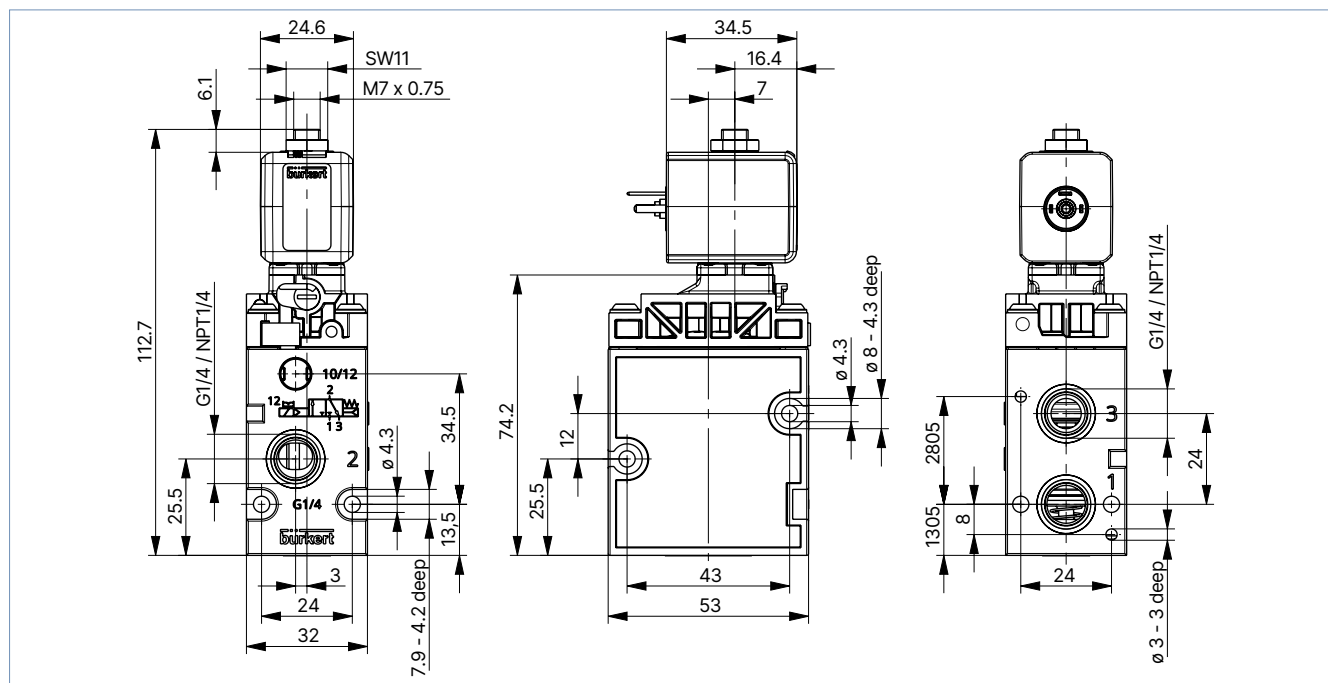


6.2. Standard version 3/2-way valve, circuit function C and D

With plug form B or C

Note:

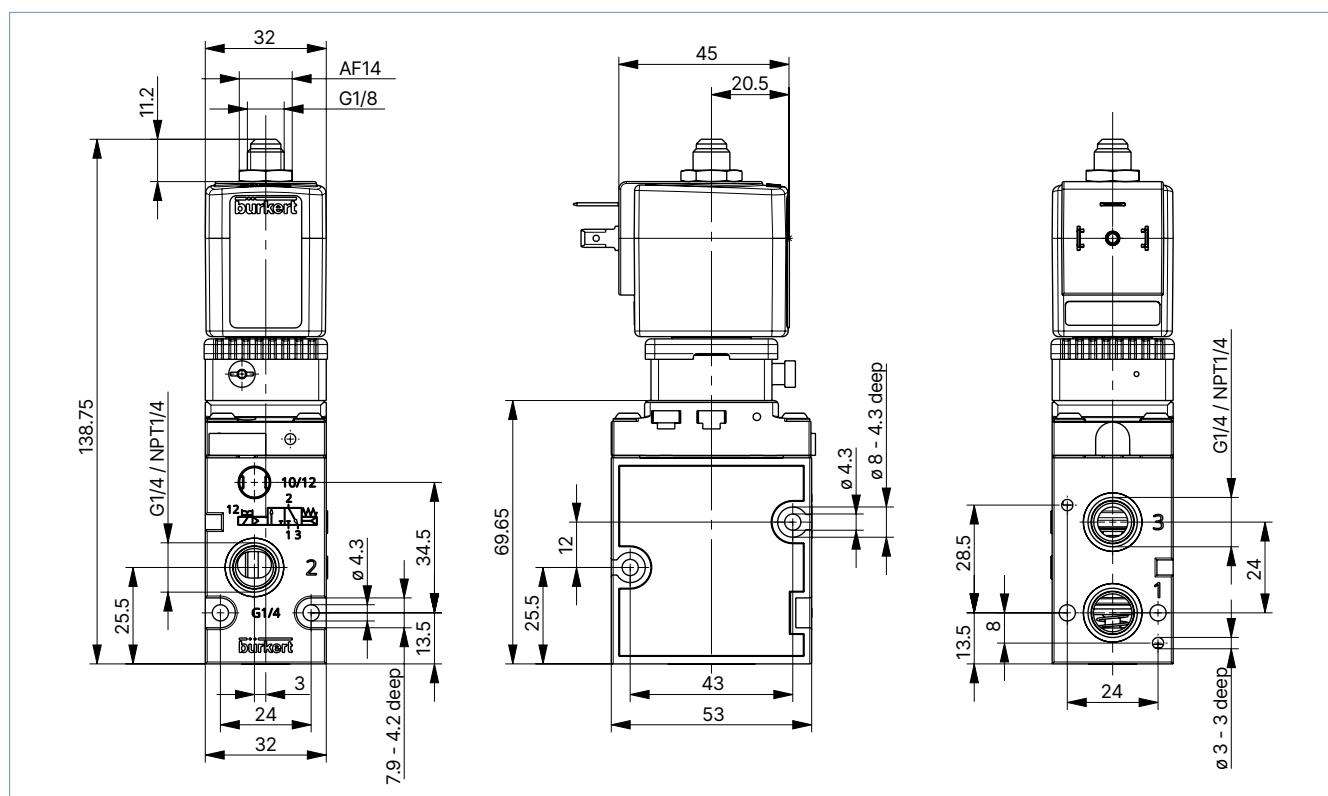
Dimensions in mm



With plug form A

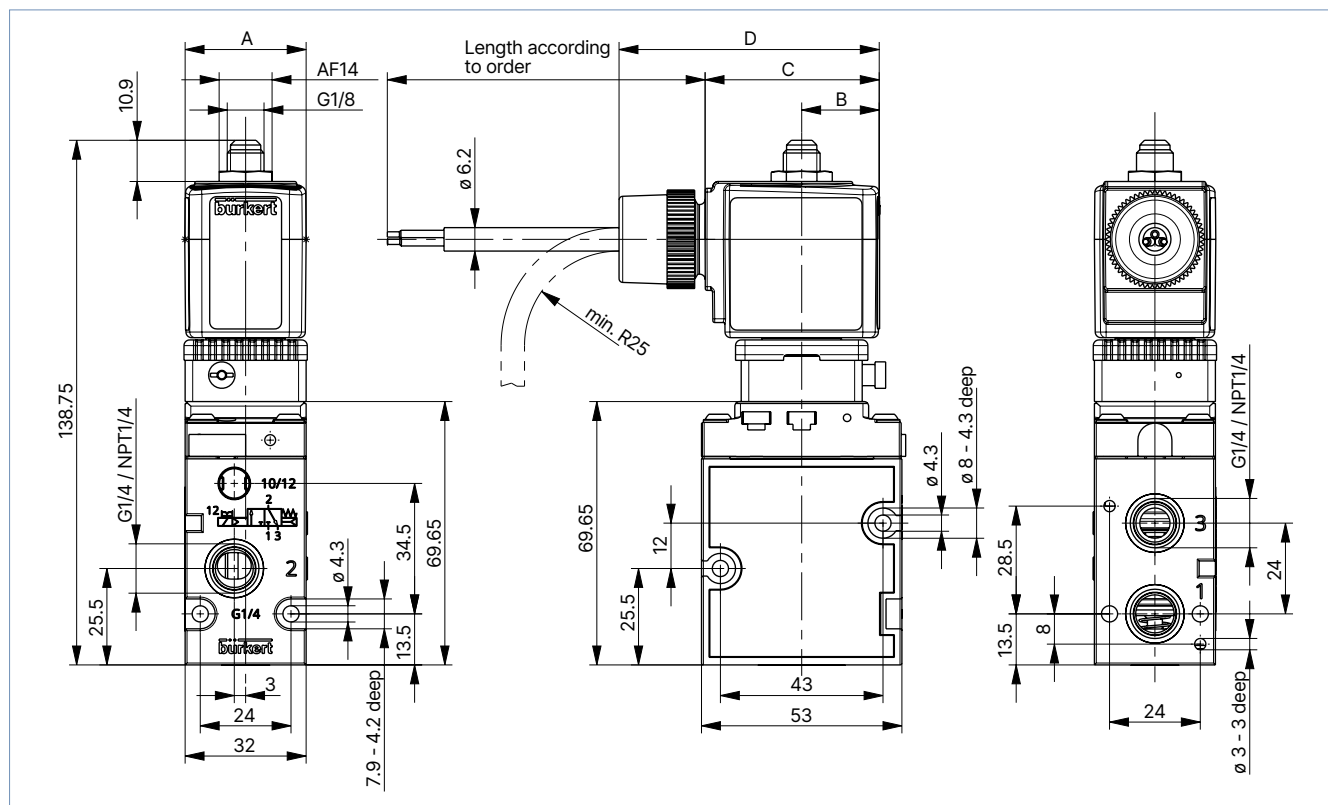
Note:

Dimensions in mm



With moulded cable (3 m long) (Ex mb)

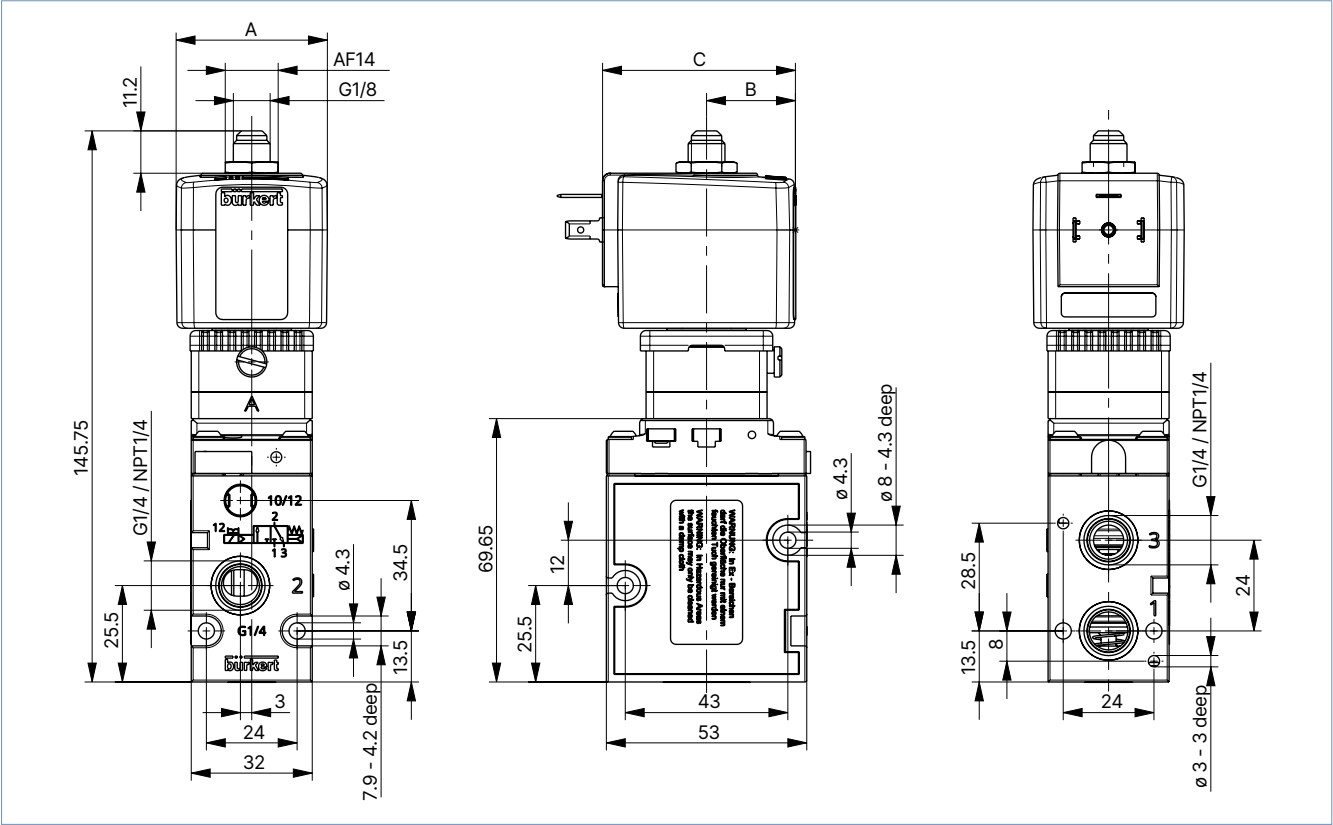
Dimensions in mm



- The dimensions of the housing are identical to the version with molded cable.
- For the coil dimensions, see chapter **“6.5. ATEX version cable coil and terminal box”** on page 13.

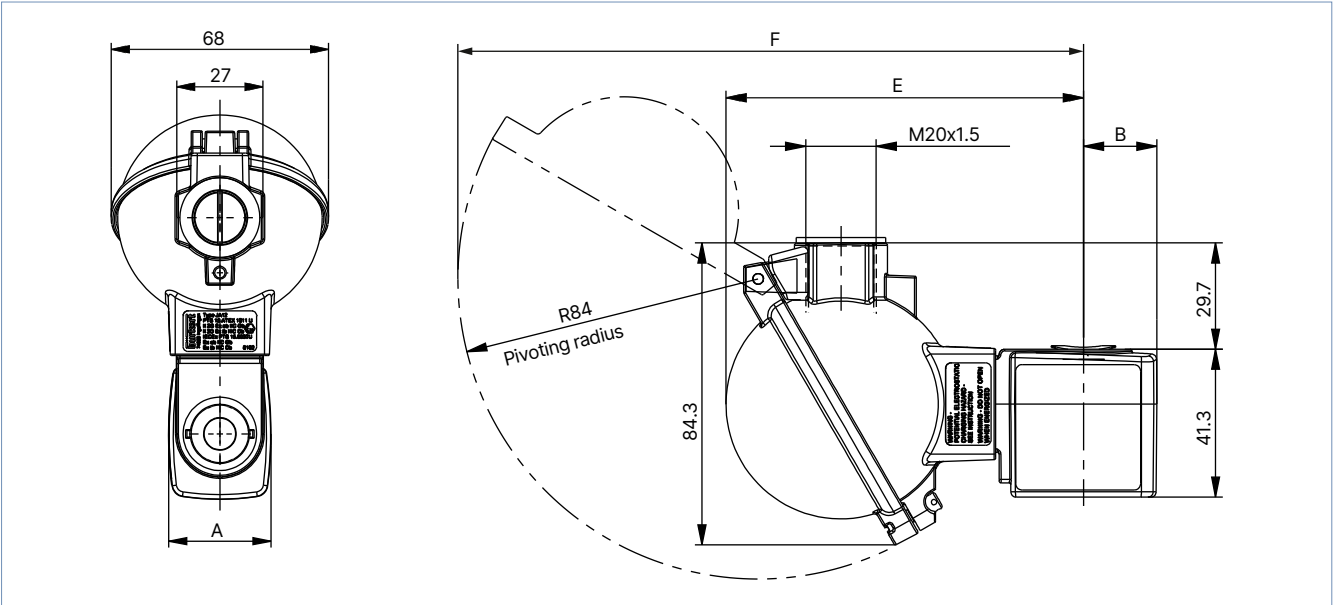
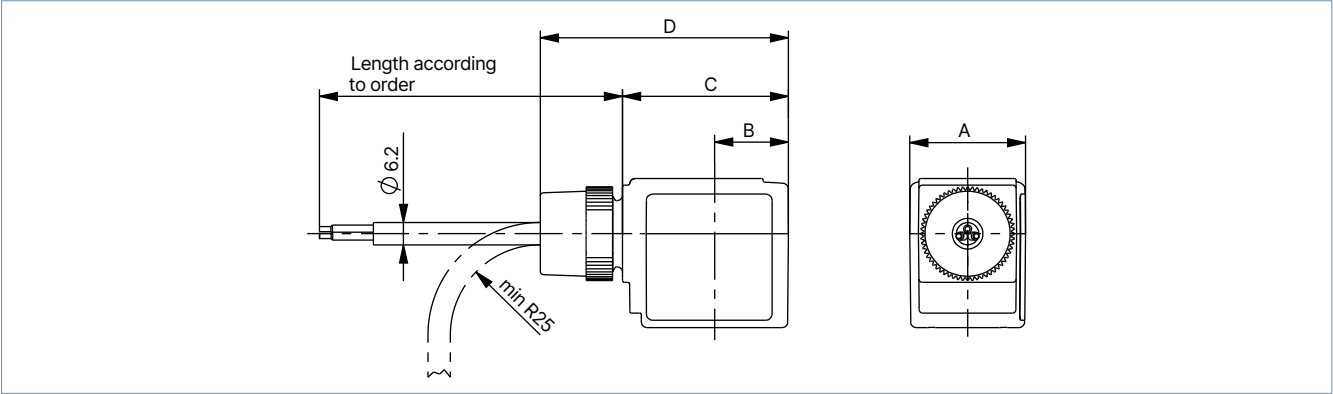
6.4. Ex ia version 3/2-way valve, circuit function C

Note:
Dimensions in mm



6.5. ATEX version cable coil and terminal box

Note:
Dimensions in mm

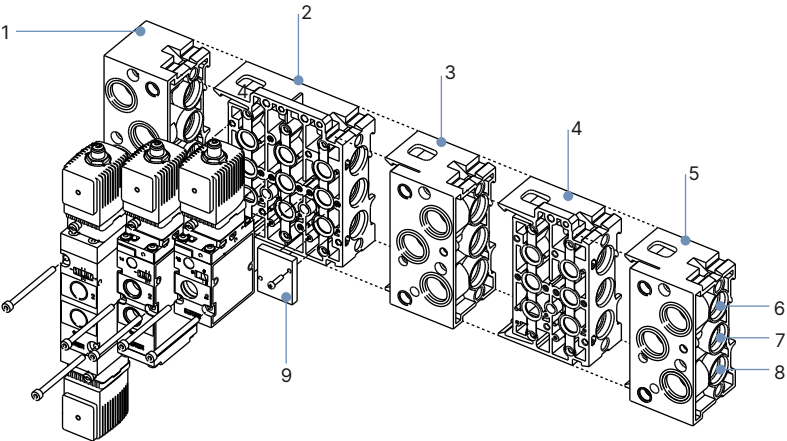


Coil size	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
5	32	20.5	46	66.8	99.8	174.7
6	40	23.5	52	74.8	102.8	177.7

7. Product design and assembly

7.1. Block assembly

Note:
Single modules or pre-assembled blocks can be ordered.



No.	Element
1	Connector module left
2	Basic module 3-fold
3	Intermediate supply module: supply channel pushed through for additional pressure supply or connector module, right: supply channel closed off, there by several operational pressures possible in a single block
4	Basic module 2-fold
5	Connector module right
6	Supply connection: 3(R)
7	Supply connection: 1(P)
8	Supply connection: 5(S)
9	Covering plate for 3/2-way valve (to cover unused connections)



DTS 1000011064 EN Version: H Status: RL (released | freigegeben | valide) printed: 18.12.2024

8. Product accessories

8.1. Cable glands for ATEX/IECEx terminal box

Note:


A polyamide cable gland is included in the scope of delivery. A nickel-plated brass version can be ordered for a surcharge, see [“Cable glands for ATEX/IECEx terminal box” on page 23.](#)

Description	Ex approvals		Dimensions											
	Certification	Identification												
Ex cable gland, Nickel-plated brass, 6...13 mm 	PTB 04 ATEX 1112 X, IECEX PTB 13.0027X	II 2 G Ex e IIC Gb, II 2 D Ex tb IIIC Db IP68		<table><tr><td>TL</td><td>29...37 mm</td></tr><tr><td>L</td><td>6 mm</td></tr><tr><td>D</td><td>20 mm</td></tr><tr><td>SW</td><td>24 mm</td></tr><tr><td>E</td><td>27 mm</td></tr></table>	TL	29...37 mm	L	6 mm	D	20 mm	SW	24 mm	E	27 mm
TL	29...37 mm													
L	6 mm													
D	20 mm													
SW	24 mm													
E	27 mm													
Ex cable gland, Polyamide, 7...13 mm 	PTB 13 ATEX 1015 X, IECEX PTB 13.0034X	II 2 G Ex e IIC Gb, II 2 D Ex tb IIIC Db IP68		<table><tr><td>TL</td><td>36...45 mm</td></tr><tr><td>L</td><td>10 mm</td></tr><tr><td>D</td><td>20 mm</td></tr><tr><td>SW</td><td>24 mm</td></tr><tr><td>E</td><td>28 mm</td></tr></table>	TL	36...45 mm	L	10 mm	D	20 mm	SW	24 mm	E	28 mm
TL	36...45 mm													
L	10 mm													
D	20 mm													
SW	24 mm													
E	28 mm													

8.2. Special tool to turn the terminal box

Note:

This special tool is not included in the scope of delivery of the valve, see [“Cable glands for ATEX/IECEx terminal box” on page 23.](#)

Description	Components of the set
Set SC02-AC10 	• Special wrench • Service manual

9. Ordering information

9.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

9.2. Bürkert configurator



Bürkert configurator – Configuring products easily

You want to put together a product that is precisely tailored to your needs in just a few guided steps? Configure selected Bürkert products with our online configurator.

[Configure product](#)

9.3. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.



[Try out our product filter](#)

9.4. Ordering chart standard version

With plug form A

Note:

- Please note that the cable plug must be ordered separately.
- See "Cable plug Type 2513, form A according to DIN EN 175301 - 803" on page 21 or separate data sheet for **Type 2513** ►.
- See "Cable plug Type 2518, form A according to DIN EN 175301 - 803" on page 21 or separate data sheet for **Type 2518** ►.
- Other variants without manual override are available on request.

Circuit function	Orifice	Q _{Nh} -value air ^{1.)}	Voltage/ Frequency	Nominal power	Pressure range ^{2.)}	Seal material Body	Electrical connection	Article no.	
	[mm]							G ¼	NPT ¼
CF C 3/2-way solenoid valve Servo-controlled, with manual override Normally closed 	8.0	1300	24 DC	2	2...10	NBR and PUR (Polyamide)	Form A	132457 ☒	132725 ☒
			24 / 50/60					132458 ☒	o. r.
			110 / 50/60					132459 ☒	o. r.
			230 / 50/60					132460 ☒	o. r.
CF D 3/2-way solenoid valve Servo-controlled, with manual override Normally open 	8.0	1300	24 DC	2	2...10	NBR and PUR (Polyamide)	Form A	132461 ☒	o. r.
			24 / 50/60					132462 ☒	o. r.
			110 / 50/60					132463 ☒	o. r.
			230 / 50/60					132464 ☒	o. r.

o. r. = on request



1.) Measurement at + 20 °C, 6 bar at valve inlet and 1 bar differential pressure

2.) Pressure data: overpressure to atmospheric pressure

With plug form B

Note:

- Please note that the cable plug must be ordered separately, see “[Cable plug Type 2507, form B according to industry standard](#)” on [page 22](#) or separate data sheet for **Type 2507** ▶.
- Other variants without manual override are available on request.

Circuit function	Orifice	Q _{Nn} -value air ^{1.)}	Voltage/ Frequency	Nominal power	Pressure range ^{2.)}	Seal material Body	Electrical connection	Article no.	
	[mm]							G ¼	NPT ¼
CF C 3/2-way solenoid valve Servo-controlled, with manual override Normally closed 	8.0	1300	24 DC	1.7	2...10	NBR and PUR (Polyamide)	Form B	20053701 𐀀	20053702 𐀀
			24 / 50					o. r.	o. r.
			024 / 60					o. r.	o. r.
			110 / 50					o. r.	o. r.
			120 / 60					o. r.	o. r.
			230 / 50					o. r.	o. r.
			240 / 60					o. r.	o. r.
CF D 3/2-way solenoid valve Servo-controlled, with manual override Normally open 	8.0	1300	24 DC	1.7	2...10	NBR and PUR (Polyamide)	Form B	o. r.	o. r.
			24 / 50					o. r.	o. r.
			024 / 60					o. r.	o. r.
			110 / 50					o. r.	o. r.
			120 / 60					o. r.	o. r.
			230 / 50					o. r.	o. r.
			240 / 60					o. r.	o. r.

o. r. = on request



1.) Measurement at + 20 °C, 6 bar at valve inlet and 1 bar differential pressure

2.) Pressure data: overpressure to atmospheric pressure

With plug form C

Note:

- Please note that the cable plug must be ordered separately, see “[Cable plug Type 2516, form C according to DIN EN 175301-803](#)” on [page 22](#) or separate data sheet for **Type 2516** ▶.
- Other variants without manual override are available on request.

Circuit function	Orifice	Q _{Nn} -value air ^{1.)}	Voltage/ Frequency	Nominal power	Pressure range ^{2.)}	Seal material Body	Electrical connection	Article no.	
	[mm]							G ¼	NPT ¼
CF C 3/2-way solenoid valve Servo-controlled, with manual override Normally closed 	8.0	1300	24 DC	1.7	2...10	NBR and PUR (Polyamide)	Form C	20053699 𐀀	20053700 𐀀
			24 / 50					o. r.	o. r.
			024 / 60					o. r.	o. r.
			110 / 50					o. r.	o. r.
			120 / 60					o. r.	o. r.
			230 / 50					o. r.	o. r.
			240 / 60					o. r.	o. r.
CF D 3/2-way solenoid valve Servo-controlled, with manual override Normally open 	8.0	1300	24 DC	1.7	2...10	NBR and PUR (Polyamide)	Form C	o. r.	o. r.
			24 / 50					o. r.	o. r.
			024 / 60					o. r.	o. r.
			110 / 50					o. r.	o. r.
			120 / 60					o. r.	o. r.
			230 / 50					o. r.	o. r.
			240 / 60					o. r.	o. r.

o. r. = on request



1.) Measurement at + 20 °C, 6 bar at valve inlet and 1 bar differential pressure

2.) Pressure data: overpressure to atmospheric pressure

9.5. Ordering chart Ex mb version (with moulded cable)

Note:

- The article numbers listed are designed for temperature class T5. Other temperature classes are available on request.
- Other variants without manual override are available on request.

Circuit function	Orifice	Q _{Nh} -value air ^{1.)}	Voltage/ Frequency	Nominal power	Pressure range ^{2.)}	Seal material Body	Article no.	
	[mm]						G ¼	NPT ¼
CF C 3/2-way solenoid valve Servo-controlled, with manual override Normally closed 	8.0	1300	24 UC	3	2...10	NBR and PUR (Polyamide)	350443 	o. r.
			110 UC				350449 	o. r.
			230 UC				350451 	o. r.
CF D 3/2-way solenoid valve Servo-controlled, with manual override Normally open 	8.0	1300	24 UC	3	2...10	NBR and PUR (Polyamide)	350452 	o. r.
			110 UC				o. r.	o. r.
			230 UC				o. r.	o. r.

o. r. = on request



1.) Measurement at + 20 °C, 6 bar at valve inlet and 1 bar differential pressure

2.) Pressure data: overpressure to atmospheric pressure

9.6. Ordering chart Ex eb mb version (with terminal box)

Note:

- The article numbers listed are designed for temperature class T5. Other temperature classes are available on request.
- Other variants without manual override are available on request.

Circuit function	Orifice	Q _{Nh} -value air ^{1.)}	Voltage/ Frequency	Nominal power	Pressure range ^{2.)}	Seal material Body	Article no.	
	[mm]						G ¼	NPT ¼
CF C 3/2-way solenoid valve Servo-controlled, with manual override Normally closed 	8.0	1300	24 UC	3	2...10	NBR and PUR (Polyamide)	350446 	o. r.
			110 UC				350450 	o. r.
			230 UC				368752 	o. r.
CF D 3/2-way solenoid valve Servo-controlled, with manual override Normally open 	8.0	1300	24 UC	3	2...10	NBR and PUR (Polyamide)	o. r.	o. r.
			110 UC				20009771 	o. r.
			230 UC				20015790 	o. r.

o. r. = on request


1.) Measurement at + 20 °C, 6 bar at valve inlet and 1 bar differential pressure

2.) Pressure data: overpressure to atmospheric pressure

9.7. Ordering chart Ex ia version (310 Ohm)

Note:

- The article numbers listed are designed for temperature class T6. Other temperature classes are available on request.
- Please note that the cable plug must be ordered separately, see ["Cable plug Type 2518, form A according to DIN EN 175301-803" on page 21](#) or separate data sheet for **Type 2518** ▶.
- Other variants with manual override are available on request.
- Other variants with 481 Ohm are available on request.

Circuit function	Orifice	Q _{Nh} -value air ^{1.)}	Pressure range ^{2.)}	Body material pilot valve	Seal material Body	Material threaded bushing	Article no.	
	[mm]	[l/min]	[bar]				G ¼	NPT ¼
CF C 3/2-way solenoid valve Servo-controlled Normally closed 	8.0	1300	2...10	Stainless steel 1.4305	NBR and PUR (Polyamide)	Stainless steel	20000908 𐀀	20000931 𐀀
						Brass, nickel-plated	20000913 𐀀	o. r.

o. r. = on request

1.) Measurement at + 20 °C, 6 bar at valve inlet and 1 bar differential pressure

2.) Pressure data: overpressure to atmospheric pressure

9.8. Ordering example Type 6518 with pneumatic module Type MP07

Note:

Valves with Ex ia coil or Ex versions with terminal boxes are not suitable for the block assembly.

Unit	Version	Article no.
1	Connector module right, G ½	635331 𐀀
1	Basic module 2-fold universal (for 3/2-, 5/2- and 5/3-way)	635319 𐀀
1	Basic module 3-fold universal (for 3/2-, 5/2- and 5/3-way)	635343 𐀀
1	Connector module left, G ½	635324 𐀀
5	Valves Type 6518	132475 𐀀


Version	Article no.
Connector module right, G ½	635331 𐀀
Intermediate supply module	637505 𐀀
Basic module 2-fold universal (for 3/2-, 5/2- and 5/3-way)	635319 𐀀
Basic module 3-fold universal (for 3/2-, 5/2- and 5/3-way)	635343 𐀀
Connector module left, G ½	635324 𐀀
Covering plate for 5/2-way and 5/3-way (to cover unused valve positions)	635335 𐀀
Covering plate for 3/2-way (to cover unused connections)	635337 𐀀

9.9. Ordering chart accessories

Cable plug Type 2513, form A according to DIN EN 175301 - 803

Note:

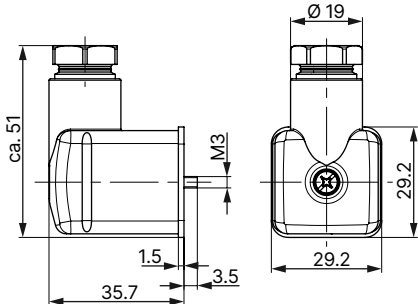
- The cable plug Type 2513 meets the requirements in accordance with ATEX Cat. 3 GD in assembly with a Bürkert solenoid valve.
- Refer to data sheet **Type 2513** ▶ for more information about the cable plug.

Cable plug	Circuit diagram	Cable length	Article no.
		[mm]	
		12000	260893 
		5000	260892 
		3000	260891 
		300	260890 

Cable plug Type 2518, form A according to DIN EN 175301 - 803

Note:

- Dimensions in mm
- For further versions see data sheet **Type 2518** ▶.

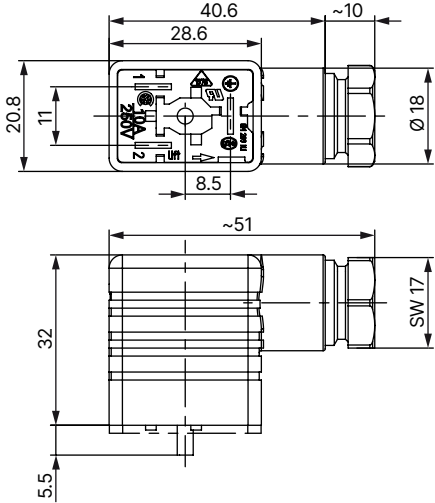
Cable plug	Dimensions	Version	Voltage	Article no.
		Without circuitry (AC/DC)	0...250 V AC/DC	314802 
		With LED (AC/DC)	12...24 V AC/DC	314812 
		With LED and varistor (AC/DC)	12...24 V AC/DC	314820 
		With rectifier, LED and varistor	12...24 V AC/DC	314816 
		Without circuitry (AC/DC) with silicone seal for higher ambient temperature, e.g. steam version (NA07)	0...250 V AC/DC	361687 

Type 6518

Cable plug Type 2507, form B according to industry standard

Note:

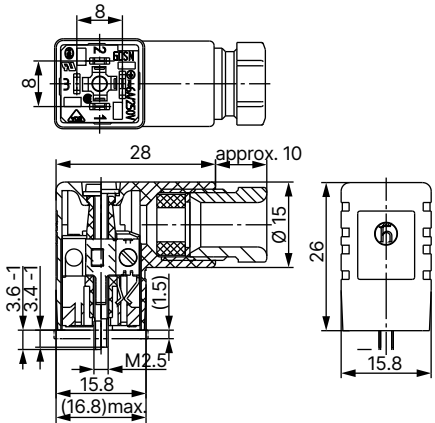
- Dimensions in mm
- Delivery of cable plug includes a flat seal and a fixing screw.
- Refer to data sheet **Type 2507** ► for more information about the cable plug.

Cable plug	Dimensions	Version	Voltage	Article no.
		Without circuitry (standard)	2...250 V AC/DC	423845 
		With LED	24 V AC/DC	423849 
		With LED and free-wheeling diode	12...24 V AC/DC	423851 
		With rectifier, LED and varistor	12...24 V AC/DC	423853 
			2...250 V AC/DC	423854 

Cable plug Type 2516, form C according to DIN EN 175301 - 803

Note:

- Dimensions in mm
- Delivery of cable plug includes a flat seal and a fixing screw.
- For further versions see data sheet **Type 2516** ►.

Cable plug	Dimensions	Version	Voltage	Article no.
		Without circuitry	0...250 V AC/DC	303141 
		With LED	12...24 V AC/DC	303145 
		With LED and varistor	12...24 V AC/DC	303148 
		With rectifier, LED and varistor	12...24 V AC/DC	303142 

Cable glands for ATEX/IECEx terminal box

Note:

- A cable gland in polyamide version is included in the delivery. A nickel-plated brass version can be ordered at surcharge.
- Refer to **“8.1. Cable glands for ATEX/IECEx terminal box” on page 15** for more information about Ex cable glands.
- Refer to **“8.2. Special tool to turn the terminal box” on page 15** for more information about special wrench.

Description	Article no.
Ex cable gland, nickel-plated brass, 6...13 mm ^{1.)}	773278 𐀀
Ex cable gland, polyamide, 7...13 mm ^{1.)}	773277 𐀀
Set SC02-AC10: special wrench ^{2.)} incl. service manual	293488 𐀀

1.) Cable diameter
2.) Not included in the scope of delivery of the valve