


DN 15-100

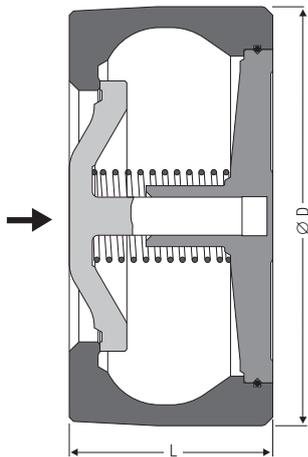

DN 125-200

Non-Return Valve RK 70, PN 6, DN 15-200

Application in heating installations. Valve disc/cone of plastics.
Noiseless operation. DN 15-100 are additionally dampened by an O-ring.

Pressure & temperature ratings

Nominal sizes	DN	15-100			125-200		
Nominal pressure	PN	6					
Max. service pressure ¹⁾	[barg]	6	3	2	1.5	1	0.5
Service temperature	[°C]	20	50	80	100	110	130
Minimum temperature	[°C]	-30 ²⁾			-10 ²⁾		

¹⁾ Max. service pressure or differential pressure in closed systems.

²⁾ Minimum temperature for nominal pressure rating.

End connections of wafer-type valves

Standard valves for fitting between flanges to DIN 2501, PN 6/10/16. DN 15-100 with spiral centering ring.

Dimensions

Nominal size	[mm] [inch]	15 ½	20 ¾	25 1	32 1¼	40 1½	50 2	65 2½	80 3	100 4	125 5	150 6	200 8	
Dimensions	L ³⁾	16	19	22	28	31.5	40	46	50	60	90	106	140	
	[mm]	D	40	47	56	72	82	95	115	132	152	184	209	264
Weight	[kg]	0.09	0.13	0.21	0.48	0.63	1.05	1.45	2.0	3.2	5.6	8.4	17	

³⁾ Short overall length to EN 558-1, table 11, series 49.

Materials

DN 15-100	DIN	
Body, seat and guide ribs	CuZn40Pb2	2.0402
Valve disc / O-ring	PPO / EPDM	
Spring retainer	X6CrNiMoTi17 12 2	1.4571
Spring to close		
Centering ring	X12CrNi17 7	1.4310
DN 125-200		
Body, seat	Cast iron GG-25	5.1301
Valve plug	Polyamide 6	
Guide	G-X8CrNi12	1.4107
Spring to close	X6CrNiMoTi17 12 2	1.4571

Non-Return Valve

RK 70, PN 6, DN 15-200

Opening Pressures

Differential pressures at zero volume flow.

DN	Opening pressures [mbar]			
	Direction of flow			
	without spring	with spring		
	↑	↑	→	↓
15	0.4	5.8	5.4	5
20	0.4	5.8	5.4	5
25	0.4	5.8	5.4	5
32	0.5	6	5.5	5
40	0.5	6	5.5	5
50	0.6	6.2	5.6	5
65	0.7	6.4	5.7	5
80	0.8	6.6	5.8	5
100	0.8	6.8	5.9	5
125	2	9	5.4	5
150	2.5	10	5.4	5
200	2.5	10	5.4	5

Specification Text

GESTRA DISCO non-return valves RK 70, PN 6. **Quiet valves for heating installations**, wafer design with extremely short overall length to DIN EN 558-1, table 11, series 49.

Standard valves for fitting between pipe flanges to DIN. Indication of nominal pressure, nominal size and body material. Shut-off provided by valve disc/cone of plastics.

Inspection & Certification

Documentation regarding material tests and in-house examination with test report to EN 10204-2.2 available at extra cost. Please state the inspection and certification requirements when inquiring or ordering. After supply of the equipment certification cannot be established. Charges and extent of the above mentioned certificates as well as the different tests confirmed therein are listed in our price list "Test and Inspection Charges for Standard Equipment". For other test certificates please consult us.

Order Specifications

Type RK 70, DN ...

Additional information: Flowrate, service pressure and temperature. Standard designation of pipe flanges.

Supply in accordance with our general terms of business.

Pressure Drop Chart

The curves given in the chart are valid for water at 20°C. For other fluids it is necessary to calculate an equivalent water volume flowrate \dot{V}_w and use this in the chart.


The pressure drop values indicated in the chart are applicable to spring-assisted valves with horizontal flow and to valves without spring mounted in vertical pipes with upward flow.

$$\dot{V}_w = \dot{V} \cdot \sqrt{\frac{\rho}{1000}}$$

\dot{V}_w = Equivalent water volume flow in [l/s] or [m³/h]

ρ = Density of the fluid (operating condition) in [kg/m³]

\dot{V} = Volume of fluid (operating condition) in [l/s] or [m³/h]

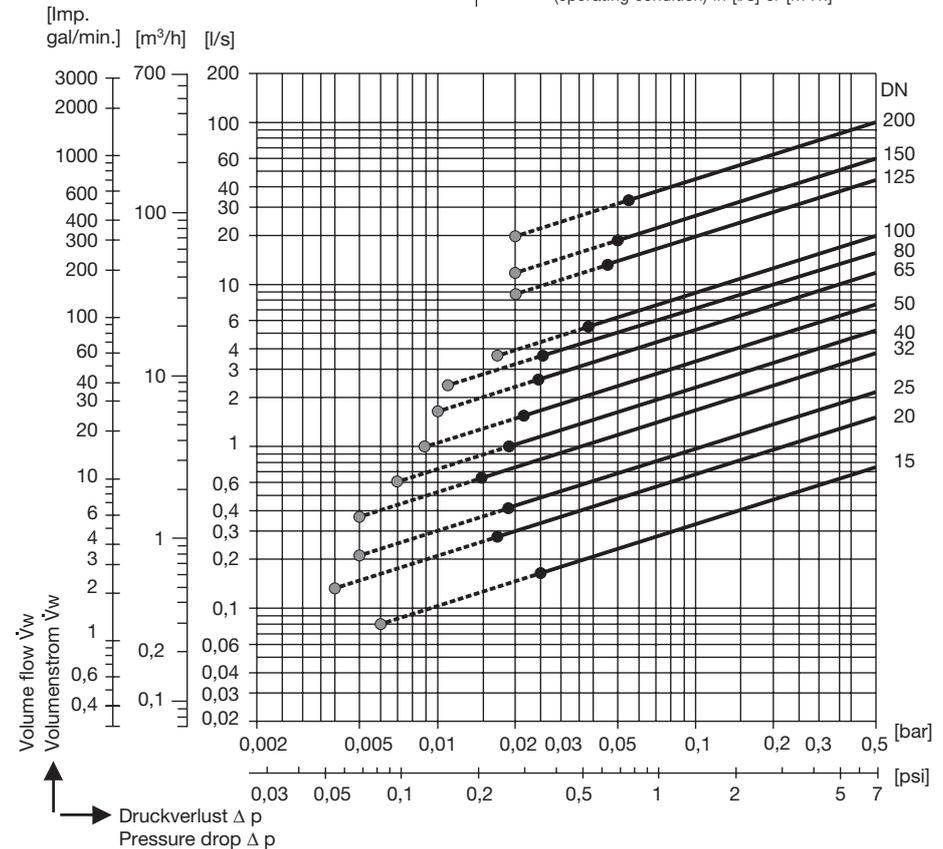

- Required minimum volume flowrate \dot{V}_w for equipment fitted without spring and mounted in vertical pipes with upward flow.
- Required minimum volume flowrate \dot{V}_w for equipment fitted with standard spring and mounted in horizontal pipes.

PED (Pressure Equipment Directive)

The equipment fulfills the requirements of the Pressure Equipment Directive PED 97/23/EC. For use with fluids of group 2. With CE marking (apart from equipment that is excluded from the scope of the PED as specified in section 3.3). For more information please refer to our PED Declaration of Conformity.

ATEX (Atmosphère Explosible)

The equipment does not have its own potential source of ignition and is therefore not subject to the ATEX Directive 94/9/EC. Applicable in Ex zones 0, 1, 2, 20, 21, 22 (1999/92/EC). The equipment does not bear an Ex marking. For more information refer to our ATEX Declaration of Manufacturer.

GESTRA AG


P. O. Box 10 54 60, D-28054 Bremen
Münchener Str. 77, D-28215 Bremen

Tel. 0049 (0) 421 35 03-0, Fax 0049 (0) 421 35 03-393


E-mail gestra.ag@flowserve.com, Web www.gestra.com



GESTRA

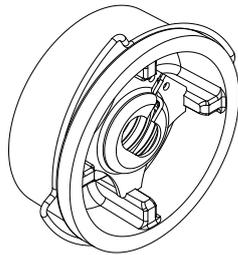

DN 15-100

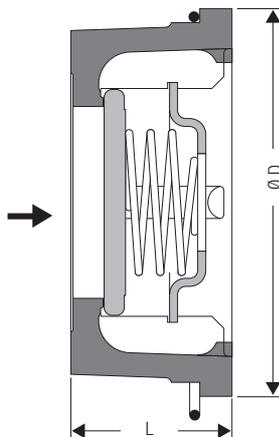

DN 15-100

Non-Return Valve

RK 71 for Flanges PN 6/10/16, DN 15-100

Description

Wafer-type non-return (check) valve for sandwiching between flanges. Valve designed with spring for installation in any position. Without spring only for vertical lines with upward flow. For use with liquids, gases and vapours of fluid group 2 (non-hazardous fluids) in accordance with the Pressure Equipment Directive (PED) 97/23/EC.

Pressure & temperature ratings

RK 71, PN 16	CW617N			
	Design temperature [°C]	20	120	200
DN 15 – 100 [barg]	16	16	14	13

Minimum temperature: -60°C (lowest service temperature at nominal pressure)

For additional information on chemical resistance go to www.gestra.de and click on "Technical Support" and then on "Chemical Resistance".

End connection

DIN / EN	BS
EN 1092-1 (2007), form B1 PN 6/10/16	BS 10 Table D, E, F

Dimensions

Nominal size	[mm]	15	20	25	32	40	50	65	80	100
	[inch]	½	¾	1	1¼	1½	2	2½	3	4
L ²⁾	[mm]	16	19	22	28	31.5	40	46	50	60
D	[mm]	40	47	56	72	82	95	115	132	152
Weight	[kg]	0.09	0.13	0.21	0.48	0.63	1.05	1.45	2.0	3.2

²⁾ Wafer design with extremely short overall length to EN 558-1, series 49.

Materials

DN 15-100	DIN / EN	ASTM equivalent	Category
Body, seat, guide ribs and insert	CW617N	C38000	Copper base alloy (hot-pressed brass)
Valve disc	1.4571	AISI 316 Ti	austenitic, corrosion-resistant steels
Spring to close	1.4571	AISI 316 Ti	austenitic, corrosion-resistant steels
Spring retainer	1.4571	AISI 316 Ti	austenitic, corrosion-resistant steels
Centering ring	1.4310	A 313 type 302	austenitic, corrosion-resistant steels

Non-Return Valve
RK 71 for Flanges
PN 6/10/16, DN 15-100

Opening pressures

Differential pressures at zero volume flow.

DN	Opening pressures [mbar]			
	without spring ↑	Direction of flow		
		↑	→	↓
15	2.5	10	7.5	5
20	2.5	10	7.5	5
25	2.5	10	7.5	5
32	3.5	12	8.5	5
40	4.0	13	9.0	5
50	4.5	14	9.5	5
65	5.0	15	10	5
80	5.5	16	10.5	5
100	6.5	18	11.5	5

Specification Text

GESTRA DISCO Non-return valve type RK 71 for flanges PN 6/10/16.

Wafer design with extremely short overall length to EN 558-1, series 49.

Suitable for fitting between pipe flanges to DIN / EN, and BS. Metal-to-metal seat. Designed in accordance with PED 97/23/CE, with CE marking. Specification of nominal pressure, size and body material according to EN 19.

Inspection & Certification

Documentation regarding material tests and in-house examination with test report EN10204-2.2 available at extra cost. All inspection requirements have to be stated with the enquiry or order. After supply of the equipment certification cannot be established. Charges and extent of the above mentioned test certificates as well as the different tests confirmed therein are listed in our Price List "Test and Inspection Charges for Standard Equipment". For other tests and inspections than those listed above, please consult us.

Please note:

The selected non-return valve must ensure that the minimum volume flowrate keeps the valve disk in the open position (see Pressure Drop Chart, "Full opening / stable range").

Supply in accordance with our general terms of business.

Pressure Drop Chart

The curves given in the chart are valid for water at 20 °C. To read the pressure drop for other fluids the equivalent water volume flowrate \dot{V}_w must be calculated and used in the graph.


The values indicated in the chart are applicable for spring-assisted valves with horizontal flow and to valves without spring installed in vertical pipes with upward flow.

$$\dot{V}_w = \dot{V} \cdot \sqrt{\frac{\rho}{1000}}$$

\dot{V}_w = Equivalent water volume flow in [l/s] or [m³/h]

ρ = Density of the fluid (operating condition) in [kg/m³]

\dot{V} = Volume of fluid (operating condition) in [l/s] or [m³/h]

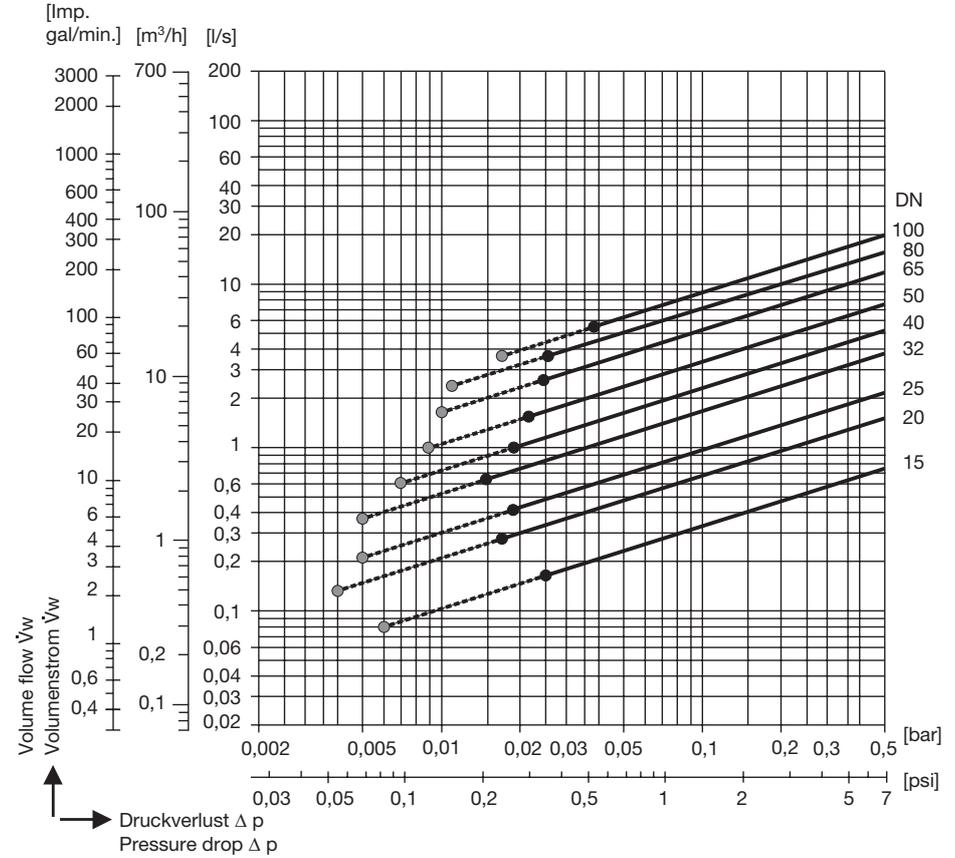

- Required minimum volume flow \dot{V}_w for equipment without spring installed in vertical pipes with upward flow.
- Required minimum volume flow \dot{V}_w for equipment with standard spring and horizontal flow.

PED (Pressure Equipment Directive)

The equipment fulfills the requirements of the Pressure Equipment Directive PED 97/23/EC. For use with fluids of group 2. With CE marking (apart from equipment that is excluded from the scope of the PED as specified in section 3.3). For more information please refer to our PED Declaration of Conformity.

ATEX (Atmosphère Explosible)

The equipment does not have its own potential source of ignition and is therefore not subject to the ATEX Directive 94/9/EC. Applicable in Ex zones (surrounding atmosphere) 0, 1, 2, 20, 21, 22 (1999/92/EC). The equipment is not Ex marked. For more information refer to our ATEX Declaration of Manufacturer.

GESTRA AG

Münchener Straße 77, 28215 Bremen, Germany
 Telefon +49 421 3503-0, Telefax +49 421 3503-393
 E-mail info@de.gestra.com, Web www.gestra.de

